



HOTON

Specifications

| | |
|----------------------------|-------------------|
| Length----- | 5600mm(6000-6500) |
| Table Width----- | 2100mm |
| Table Height----- | 320-1180mm |
| Diameter of the Post ----- | 160mm |
| Hydraulic Pressure ----- | 70MPa |
| Post Max. Tension ----- | 10T |
| Post Working Rang----- | 360° |
| Height of the Post----- | 2050mm |
| Pulling Stroke----- | 358mm |
| Pneumatic Pressure ----- | 0.5-0.8MPa |
| Max Load----- | 3500kg |
| Weight ----- | 2600kg |


Performance Introduction

Take the most advanced technology of the globe. We also take the actual problems existing during domestic auto repairing works into sensible consideration. This equipment is aiming at Practicability, safety and accuracy. The adaptation of modular design concept as well as professional division of labor, with our great passion and exquisite workmanship, creates distinguished quality and technology.

Main Feature:

- 1: Single cylinder hydraulic self-locking vertical lifting platform, can adjust from 300-1180mm according to working request. The lifting platform has machinery and hydraulic double-locking device.
- 2: Square holes type working platform which was once moulded by large-scale numerical control flame cutting. The platform has high flatness and strength which has no fixation dead zone and more fast and convenient pulling.
- 3: Double tower can rotate 360° across the platform. The rolling of the unique roller makes the tower rotate more stably and flexibly. Unique tower fixation type is facility and reliaboe and without dead zone.
- 4: Screw lifting design of the universal main clamp which has unique clamp jew design, can fix and clamp the vehicle fast and stably.
- 5: High strength pulling tools, adopts alignment to almost all figurate deformation. Fiexible, convenient, and long service life.
- 6: The hydraulic system is reliable and strong. Has long service time. Can be maintenace and convenien

Standard accessories

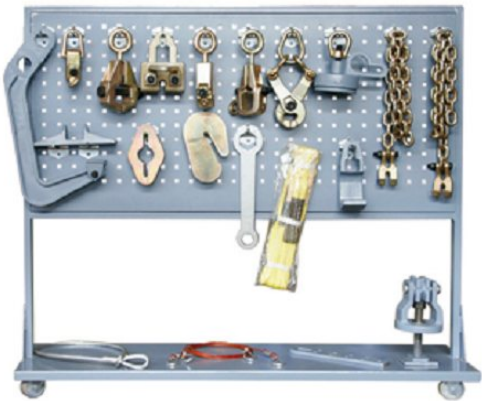



Pulling Tower with 10T capacity



Hydraulic vertical lifting bench
with self locking system



Guide Ring, make the pulling
more easily



Control Box(Optional)

